



FEATURES

STRIKING OVERSCALED CYLINDRICAL HEAD GIVES AMBIENT ROOM LIGHT THROUGH THE MATT OPAL GLASS TOP DOME AND DIRECTIONAL TASK LIGHT FROM BELOW. HEAD SWIVELS RIGHT/LEFT WITH A MECHANICAL STOP TO PREVENT OVER ROTATION.

MATERIAL

STEEL AND GLASS WITH ACRYLIC DIFFUSER

FINISH

BRUSHED NICKEL (BN)

CERTIFICATIONS

CE UK CA IP20

DIMENSIONS



FULL TECHNICAL SPECIFICATION

MATERIAL	STEEL AND GLASS WITH ACRYLIC DIFFUSER	DRIVER LOCATION	INTEGRAL
FINISH	BRUSHED NICKEL (BN)	DIMMABLE AS STANDARD?	BY REQUEST ONLY
LAMPHOLDER TYPE	INTEGRAL LED	INSULATION RATING	CLASS I
INTEGRAL LIGHT SOURCE	2 X LED 3W 2700K	IP RATING	IP20
COLOUR TEMPERATURE	2700K	PROJECTION	165MM
WATTAGE (W) - INTEGRAL LED	6W	BACKPLATE DIMENSIONS	100MM DIAMETER
CE	YES	NET PRODUCT WEIGHT	1.75KG
UKCA	YES	OVERALL HEIGHT AS SHOWN	450MM
UL	FOR UL PLEASE ENQUIRE.	OVERALL WIDTH AS SHOWN	100MM

FOR MORE INFORMATION ABOUT THIS PRODUCT:





Email: sales@chelsom.co.uk | Call: +44 (0)1253 831400

Chelsom Limited, Heritage House, Clifton Road, Blackpool, Lancashire FY4 4QA, United Kingdom

wordpress-700079-2614039.cloudwaysapps.com

— CHELSOM —


EST. 1947

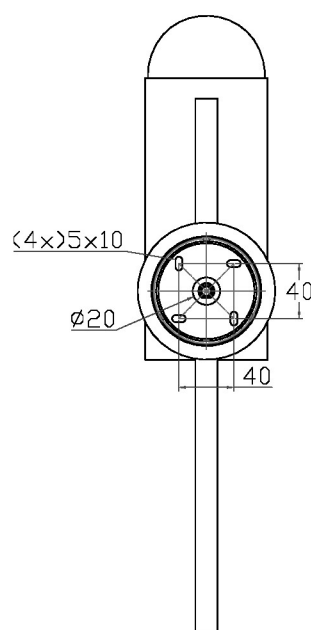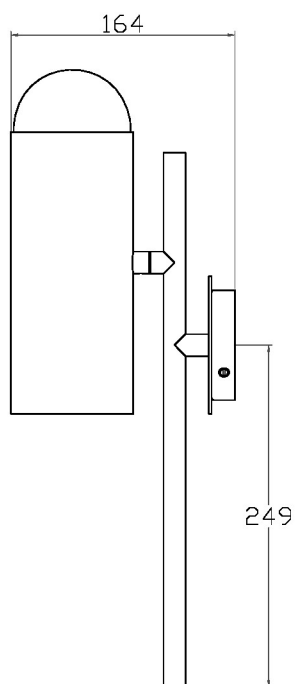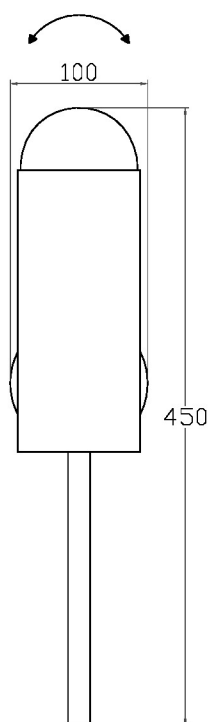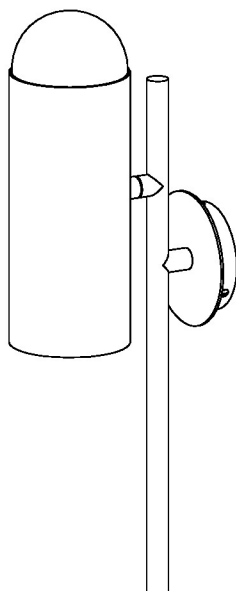

— CHELSOM —


EST. 1947

FOLLOW THE NUMBERED ASSEMBLY SEQUENCE

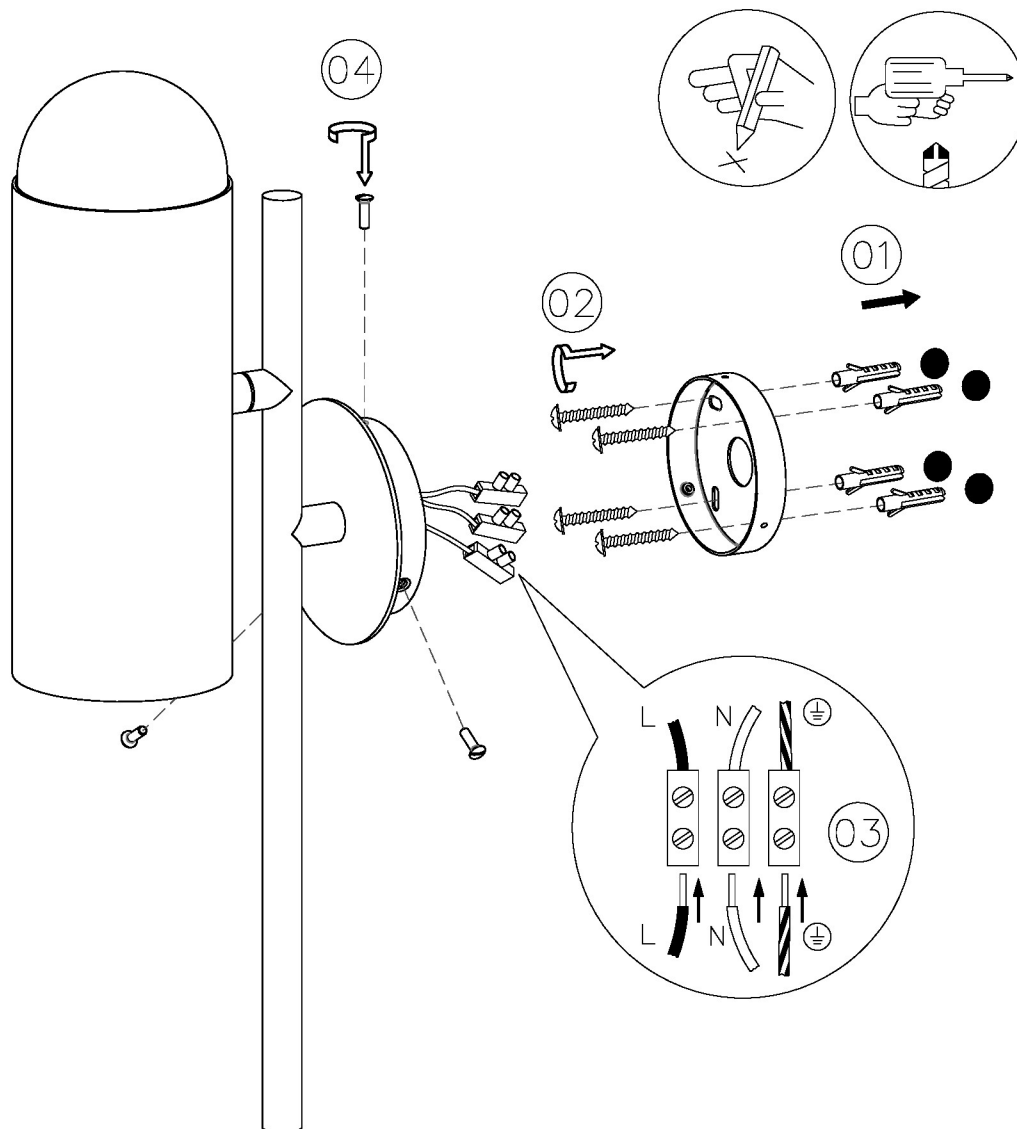


SLR Information

This product contains a light source
of Energy Efficiency Class E
Regulation 2021 No. 1095



LED light source
replaceable by
qualified person



Control gear
replaceable by
qualified person

www.chelsom.co.uk