

EST. 1947





SWITCH TYPE

FEATURES

ADJUSTABLE DOMED HEAD READING LIGHT WITH PUSH SWITCH OPERATION AND USB PORT. INTEGRAL DRIVER INCLUDED.

MATERIAL

STEEL

FINISH

SATIN BLACK WITH BRUSHED BRASS (BL/BRB)

CERTIFICATIONS

C € 监 <⇒ ± IP20

DIMENSIONS



FULL TECHNICAL SPECIFICATION

MATERIAL	STEEL	DIMMABLE AS STANDARD?	BY REQUEST ONLY
FINISH	SATIN BLACK WITH	USB	YES
	BRUSHED BRASS (BL/BRB)	INSULATION RATING	CLASSI
LAMPHOLDER TYPE	INTEGRAL LED	IP RATING	IP20
INTEGRAL LIGHT SOURCE	LED 1W 2700K		75.44
COLOUR TEMPERATURE	2700K	PROJECTION	75MM
COLOUR TEMPERATURE	2700K	BACKPLATE DIMENSIONS	180 X 60MM
WATTAGE (W) - INTEGRAL LED	1W	CUTOUT DIMENSIONS	157 X 52MM
CE	YES	NET PRODUCT WEIGHT	0.01/0
UKCA	YES	NET PRODUCT WEIGHT	0.9KG
ORCA	TLS	OVERALL HEIGHT AS SHOWN	180MM
UL	FOR UL PLEASE ENQUIRE.	OVERALL WIDTH AS SHOWN	60MM
DRIVER LOCATION	INTEGRAL	OVERALL WIDTH AS SHOWN	OOMINI


FOR MORE INFORMATION ABOUT THIS PRODUCT:


PUSH


Email: sales@chelsom.co.uk | Call: +44 (0)1253 831400


- CHELSOM -

EST. 1947





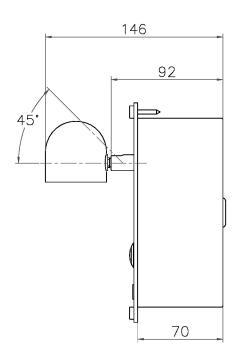




LED/14
Revision A

www.chelsom.co.uk

- CHELSOM -


EST. 1947

FOLLOW THE NUMBERED ASSEMBLY SEQUENCE

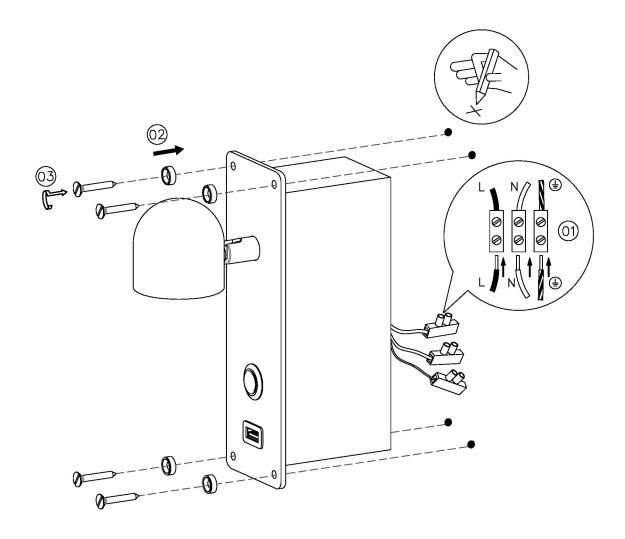

SLR Information

This product contains a light source of Energy Efficiency Class E Regulation 2021 No. 1095



Non-replaceable light source



Control gear replaceable by qualified person

www.chelsom.co.uk