
EST. 1947





FEATURES

A DISCREET RECESSED HEADBOARD READING LIGHT, NEARLY ENTIRELY FLUSH, WITH OPENING LIP FEATURE WHICH ENABLES ROTATION AND AUTOMATIC LIGHT OPERATION. PROVIDES A FULL RANGE OF WARM DIRECTIONAL READING LIGHT. CUSTOM COMBINATION FINISH AVAILABLE TO ORDER FOR MINIMUM QUANTITIES OF 50 PIECES.

MATERIAL

STEEL AND ALUMINIUM

FINISH

BRUSHED BRASS WITH SATIN BLACK (BRB/BL)

CERTIFICATIONS

DIMENSIONS



FULL TECHNICAL SPECIFICATION


MATERIAL	STEEL AND ALUMINIUM	SWITCH TYPE	DOCKING SWITCH
FINISH	BRUSHED BRASS WITH	DIMMABLE AS STANDARD?	BY REQUEST ONLY
	SATIN BLACK (BRB/BL)	INSULATION RATING	CLASS II
LAMPHOLDER TYPE	INTEGRAL LED	IP RATING	IP20
INTEGRAL LIGHT SOURCE	LED 1W 2700K		11 20
		PROJECTION	17MM
COLOUR TEMPERATURE	2700K	BACKPLATE DIMENSIONS	94MM DIAMETER
WATTAGE (W) - INTEGRAL LED	1W		
0.5	V/FC	CUTOUT DIMENSIONS	75MM DIAMETER
CE	YES	NET PRODUCT WEIGHT	0.35KG
UKCA	YES		
	VEC	OVERALL HEIGHT AS SHOWN	94MM
UL	YES	OVERALL WIDTH AS SHOWN	94MM
DRIVER LOCATION	REMOTE		


FOR MORE INFORMATION ABOUT THIS PRODUCT:


Email: sales@chelsom.co.uk | Call: +44 (0)1253 831400


CHELSOM—


EST. 1947











LED/11

Revision A


www.chelsom.co.uk

Ø75


— CHELSOM —

EST. 1947

FOLLOW THE NUMBERED ASSEMBLY SEQUENCE

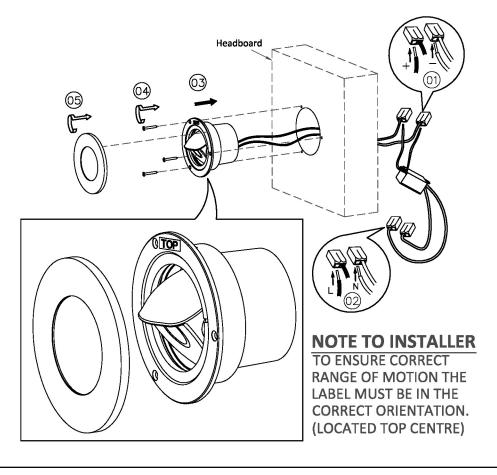


RANGE OF MOVEMENT

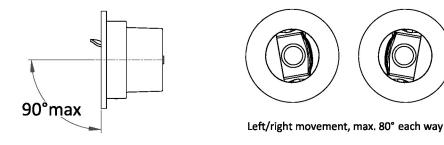

SLR Information

This product contains a light source of Energy Efficiency Class E Regulation 2021 No. 1095



Non-replaceable light source



Control gear replaceable by qualified person

www.chelsom.co.uk