

EST. 1947





FEATURES

DIMMABLE INTEGRAL LED LIGHT SOURCE GIVES AMBIENT LIGHT THROUGH PERFORATED METAL FRAME WITH SOFT DIFFUSED DOWNLIGHT FROM OPAL ACRYLIC DIFFUSER.

MATERIAL

STEEL AND ACRYLIC

FINISH

GOLDEN BRONZE METALWORK WITH MATT OPAL ACRYLIC

CERTIFICATIONS

DIMENSIONS

| 300 | | 300 | | Weight 1.85kg

FULL TECHNICAL SPECIFICATION


MATERIAL	STEEL AND ACRYLIC	DIMMABLE AS STANDARD?	YES
FINISH	GOLDEN BRONZE	DIMMING TYPE	1-10V
	METALWORK WITH MATT OPAL ACRYLIC	INSULATION RATING	CLASS I
LAMPHOLDER TYPE	INTEGRAL LED	IP RATING	IP20
INTEGRAL LIGHT SOURCE	LED 10W 2700K	WIDTH	300
COLOUR TEMPERATURE	2700K	HEIGHT	100
WATTAGE (W) - INTEGRAL LED	10W	CEILING PLATE DIMENSIONS	300MM DIAMETER
CE	YES	NET PRODUCT WEIGHT	1.85KG
UKCA	YES	OVERALL HEIGHT AS SHOWN	100MM
UL	YES	OVERALL WIDTH AS SHOWN	300MM
UL			
DRIVER LOCATION	INTEGRAL		


FOR MORE INFORMATION ABOUT THIS PRODUCT:


Email: sales@chelsom.co.uk | Call: +44 (0)1253 831400

- CHELSOM -

EST. 1947







AD/35/FF


Revision A

www.chelsom.co.uk

- CHELSOM -


EST. 1947

FOLLOW THE NUMBERED ASSEMBLY SEQUENCE

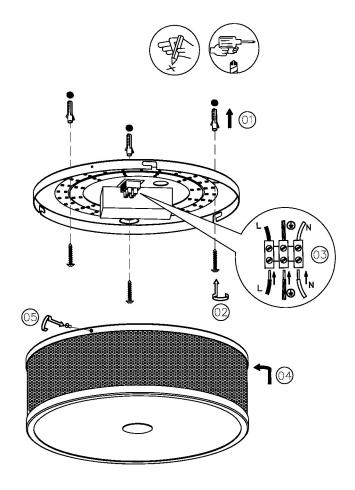

SLR Information

This product contains a light source of Energy Efficiency Class E Regulation 2021 No. 1095



LED light source replaceable by qualified person



Control gear replaceable by qualified person

www.chelsom.co.uk