

EST. 1947





### **FEATURES**

INTERNAL INTEGRAL LED LIGHT SOURCE ALLOWS VERY SHALLOW SHADE FOR UNIQUE PROPORTIONS AND EXCELLENT DIFFUSED LIGHT DISTRIBUTION. COMPLETE WITH AN OFF WHITE FABRIC SHADE SECURED ON TOP WITH A DECORATIVE GROOVED DISC. SUPPLIED FLAT-PACKED TO REDUCE PACKAGING VOLUME AND CARBON FOOTPRINT.

#### MATERIAL

STEEL AND FABRIC

#### **FINISH**

BRUSHED BRASS (BRB)

## **CERTIFICATIONS**

### **DIMENSIONS**

# **FULL TECHNICAL SPECIFICATION**


MATERIAL	STEEL AND FABRIC	DIMMABLE AS STANDARD?	YES
FINISH	BRUSHED BRASS (BRB)	DIMMING TYPE	1-10V
LAMPHOLDER TYPE	INTEGRAL LED	INSULATION RATING	CLASSI
INTEGRAL LIGHT SOURCE	LED 5W 2700K	IP RATING	IP20
COLOUR TEMPERATURE	2700K	PROJECTION	310MM
WATTAGE (W) - INTEGRAL LED	5W	BACKPLATE DIMENSIONS	120MM DIAMETER
CE	YES	NET PRODUCT WEIGHT	1.1KG
UKCA	YES	OVERALL HEIGHT WITH SHADE	4051414
UL	FOR UL PLEASE ENQUIRE	AS SHOWN	195MM
DRIVER LOCATION	INTEGRAL	OVERALL WIDTH WITH SHADE AS SHOWN	250MM


## FOR MORE INFORMATION ABOUT THIS PRODUCT:


Email: sales@chelsom.co.uk | Call: +44 (0)1253 831400

# - CHELSOM -

EST. 1947



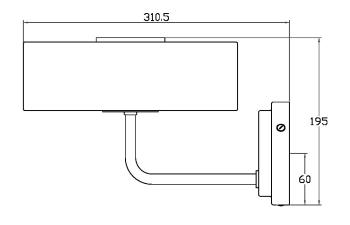



**RI/23/W1** 


**Revision A** 

www.chelsom.co.uk

# - CHELSOM-


EST. 1947

# FOLLOW THE NUMBERED ASSEMBLY SEQUENCE

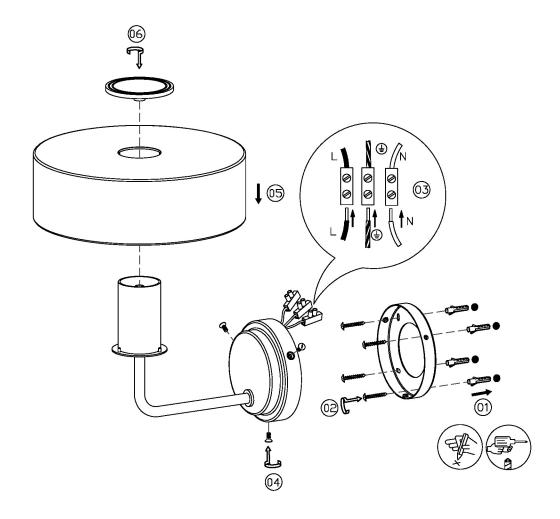

# **SLR Information**

This product contains a light source of Energy Efficiency Class E Regulation 2021 No. 1095



LED light source replaceable by qualified person



Control gear replaceable by qualified person

www.chelsom.co.uk