

EST. 1947





#### **FEATURES**

A DISCREET RECESSED HEADBOARD READING LIGHT, NEARLY ENTIRELY FLUSH, WITH OPENING LIP FEATURE WHICH ENABLES ROTATION AND AUTOMATIC LIGHT OPERATION. PROVIDES A FULL RANGE OF WARM DIRECTIONAL READING LIGHT.

#### MATERIAL

STEEL AND ALUMINIUM

#### FINISH

**BRUSHED BRASS (BRB)** 

#### **CERTIFICATIONS**

C € 쌂 ୃL □ IP20

#### **DIMENSIONS**



## **FULL TECHNICAL SPECIFICATION**


MATERIAL	STEEL AND ALUMINIUM	SWITCH TYPE	DOCKING SWITCH
FINISH	BRUSHED BRASS (BRB)	DIMMABLE AS STANDARD?	BY REQUEST ONLY
LAMPHOLDER TYPE	INTEGRAL LED	INSULATION RATING	CLASS II
INTEGRAL LIGHT SOURCE	LED 1W 2700K	IP RATING	IP20
COLOUR TEMPERATURE	2700K	PROJECTION	17MM
WATTAGE (W) - INTEGRAL LED	1W	BACKPLATE DIMENSIONS	94MM DIAMETER
CE	YES	CUTOUT DIMENSIONS	75MM DIAMETER
UKCA	YES	NET PRODUCT WEIGHT	0.35KG
UL	YES	OVERALL HEIGHT AS SHOWN	94MM
DRIVER LOCATION	REMOTE	OVERALL WIDTH AS SHOWN	94MM


### FOR MORE INFORMATION ABOUT THIS PRODUCT:


Email: sales@chelsom.co.uk | Call: +44 (0)1253 831400


# CHELSOM—


**EST. 1947** 











**LED/11** 

**Revision A** 


www.chelsom.co.uk

Ø75


# — CHELSOM —

EST. 1947

## FOLLOW THE NUMBERED ASSEMBLY SEQUENCE

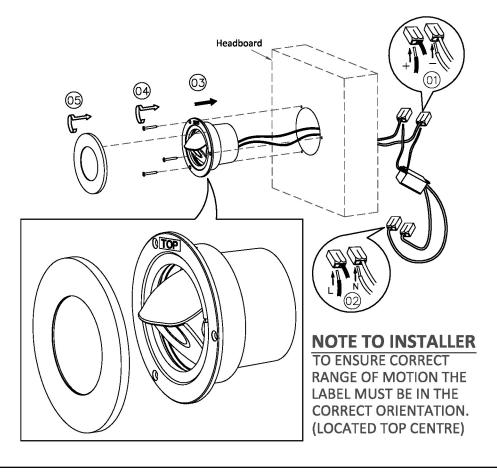


#### RANGE OF MOVEMENT

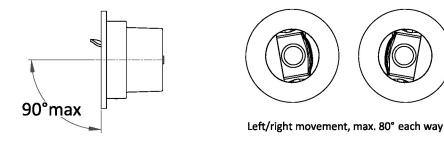

### **SLR Information**

This product contains a light source of Energy Efficiency Class E Regulation 2021 No. 1095



Non-replaceable light source



Control gear replaceable by qualified person

www.chelsom.co.uk