

EST. 1947

DIMMABLE AS STANDARD?





FEATURES

DIMMABLE INTEGRAL LED LIGHT SOURCE GIVES AMBIENT LIGHT THROUGH PERFORATED METAL FRAME WITH SOFT DIFFUSED DOWNLIGHT FROM OPAL ACRYLIC DIFFUSERS TOP AND BOTTOM.

MATERIAL

STEEL AND ACRYLIC

FINISH

GOLDEN BRONZE METALWORK WITH MATT OPAL ACRYLIC

CERTIFICATIONS

C € 받 \pm IP20

DIMENSIONS



FULL TECHNICAL SPECIFICATION

MATERIAL	STEEL AND ACRYLIC	DIMMING TYPE	1-10V
FINISH	GOLDEN BRONZE	INSULATION RATING	CLASS I
	METALWORK WITH MATT OPAL ACRYLIC	IP RATING	IP20
LAMPHOLDER TYPE	INTEGRAL LED	WIDTH WITH SHADE	285
INTEGRAL LIGHT SOURCE	LED 8W 2700K	HEIGHT WITH SHADE	120
COLOUR TEMPERATURE	2700K	PROJECTION	100MM
WATTAGE (W) - INTEGRAL LED	8W	BACKPLATE DIMENSIONS	120 X 285MM
CE	YES	NET PRODUCT WEIGHT	1KG
UKCA	YES	OVERALL HEIGHT AS SHOWN	120MM
UL	FOR UL PLEASE ENQUIRE.	OVERALL WIDTH AS SHOWN	285MM
DRIVER LOCATION	INTEGRAL		


FOR MORE INFORMATION ABOUT THIS PRODUCT:


YES


Email: sales@chelsom.co.uk | Call: +44 (0)1253 831400


- CHELSOM -

EST. 1947





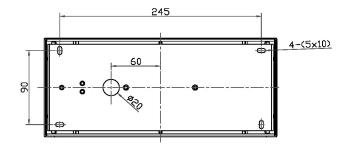



AD/35/WW


Revision A

www.chelsom.co.uk

- CHELSOM-


EST. 1947

FOLLOW THE NUMBERED ASSEMBLY SEQUENCE

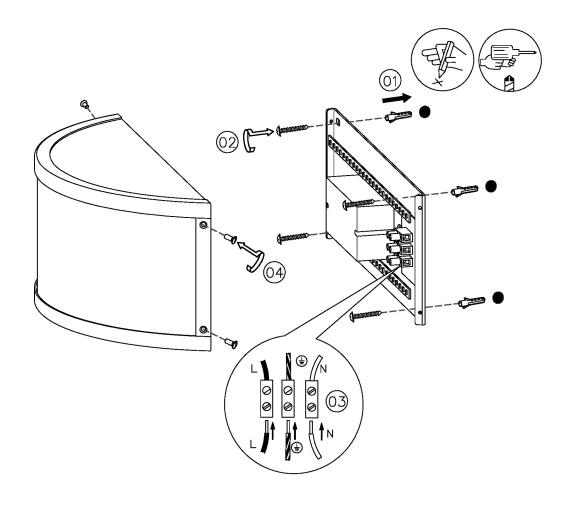

SLR Information

This product contains a light source of Energy Efficiency Class E Regulation 2021 No. 1095



LED light source replaceable by qualified person



Control gear replaceable by qualified person

www.chelsom.co.uk