

EST. 1947

DRIVER LOCATION





FEATURES

DIMMABLE INTEGRAL LED LIGHT SOURCES GIVE AMBIENT LIGHT THROUGH PERFORATED METAL FRAMES WITH SOFT DIFFUSED DOWNLIGHT FROM OPAL ACRYLIC DIFFUSERS.

MATERIAL

STEEL AND ACRYLIC

FINISH

GOLDEN BRONZE METALWORK WITH MATT OPAL ACRYLIC

CERTIFICATIONS

C € 받 \pm IP20

DIMENSIONS



FULL TECHNICAL SPECIFICATION

MATERIAL	STEEL AND ACRYLIC	DIMMABLE AS STANDARD?	YES
FINISH	GOLDEN BRONZE	DIMMING TYPE	1-10V
	METALWORK WITH MATT OPAL ACRYLIC	INSULATION RATING	CLASSI
LAMPHOLDER TYPE	INTEGRAL LED	IP RATING	IP20
INTEGRAL LIGHT SOURCE	LED 20W 2700K	WIDTH	600
COLOUR TEMPERATURE	2700K	HEIGHT	300
WATTAGE (W) - INTEGRAL LED	20W	CEILING PLATE DIMENSIONS	600MM DIAMETER
CE	YES	NET PRODUCT WEIGHT	8KG
UKCA	YES	OVERALL HEIGHT AS SHOWN	310MM
UL	FOR UL PLEASE ENQUIRE.	OVERALL WIDTH AS SHOWN	600MM


FOR MORE INFORMATION ABOUT THIS PRODUCT:


INTEGRAL

Email: sales@chelsom.co.uk | Call: +44 (0)1253 831400

- CHELSOM -

EST. 1947



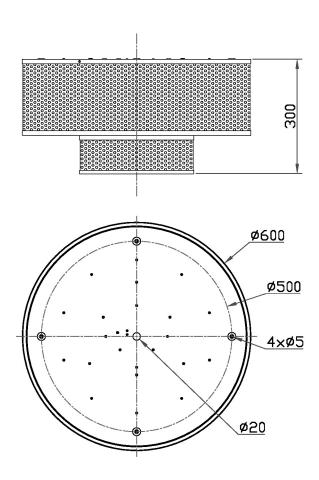


AD/35/FF2
Revision A

- CHELSOM-


EST. 1947

FOLLOW THE NUMBERED ASSEMBLY SEQUENCE

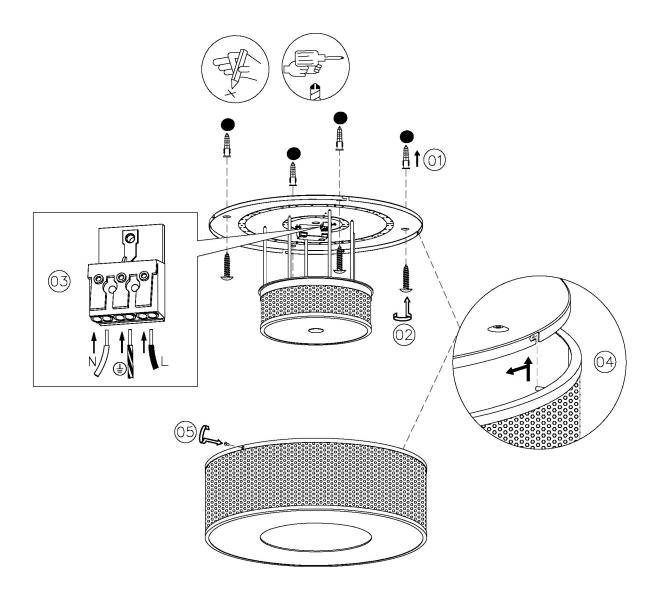

SLR Information

This product contains a light source of Energy Efficiency Class E Regulation 2021 No. 1095



LED light source replaceable by qualified person



Control gear replaceable by qualified person

www.chelsom.co.uk