

— CHELSOM —

INSTALLATION INFORMATION – LED REVOLUTION LED/6/*


General

LED Revolution is intended for use as a bedside reading light and will normally be mounted onto a headboard though it can also be fitted into a cavity wall. It MUST be mounted horizontally with the push switch orientated next to the bed (left or right side). The diffuser will direct and focus the light towards the position on the bed where a guest may be reading. Depressing the push switch causes the central housing to rotate, exposing the diffuser and activating the light source. The dimple in the central housing should be used to rotate and close it thereby switching off the light.


Installation

1. Headboards or cavity walls should be cut out to dimensions of 115mm x 62mm. It is important to use those EXACT dimensions.

Elevation

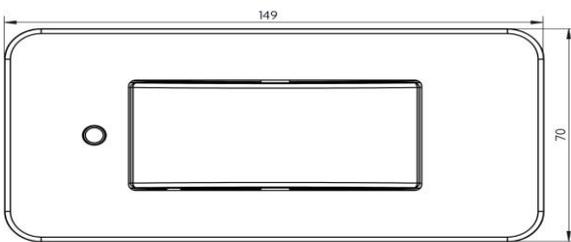

Product is to be mounted horizontally and cutout dimensions must be 115mm x 62mm.

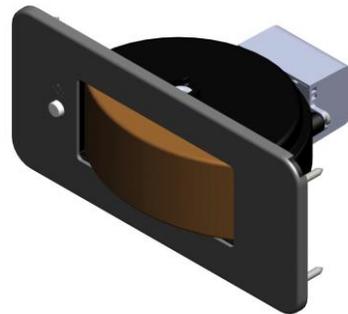

2. The decorative front plate should be removed by inserting the end of a screwdriver or similar into the corner cutout and easing it off from its spring-loaded clip.



Removing frontplate from snap-on mechanism





3. Locate the 4 x countersunk-head self-tapping 'Twin-fast' screws in the carton and use them to screw the main casing to the headboard or wall, having checked suitability of screw type.

— CHELSOM —

- The integral LED driver is mounted to the back of the main casing and a total depth of 80mm will be needed from the front face of the headboard or wall surface.

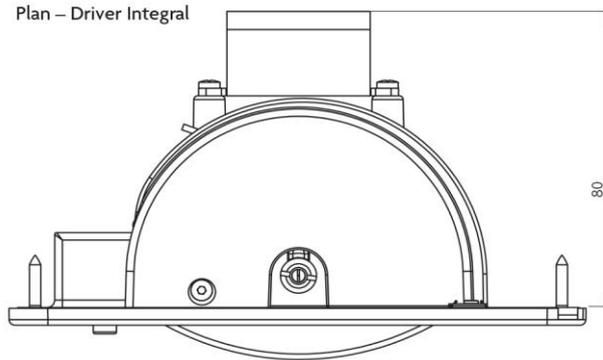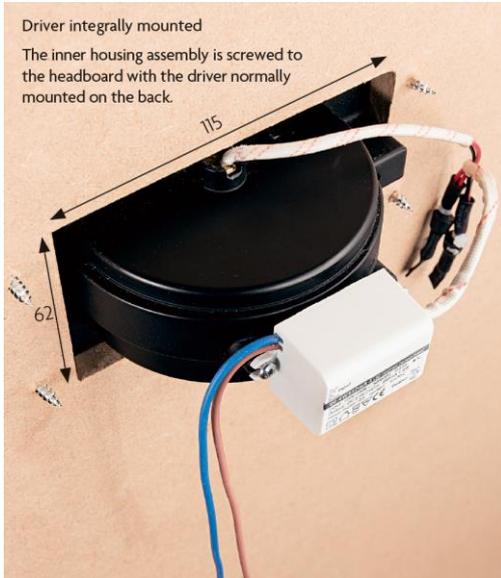

Should this depth be too great for the space available, the driver may be removed from the casing by loosening the retaining bolts and mounted remotely onto the back of the headboard or wall using the 2 x domed-head self-tapping 'twin-fast' screws provided. This option reduces the depth required to 58mm.

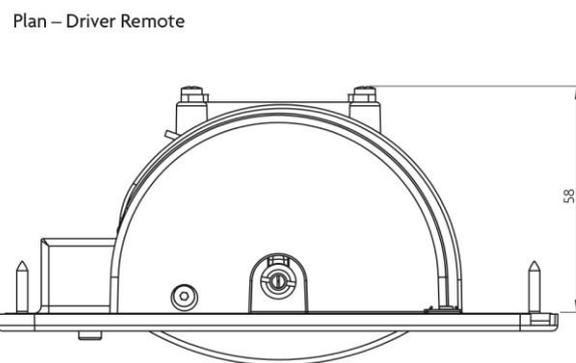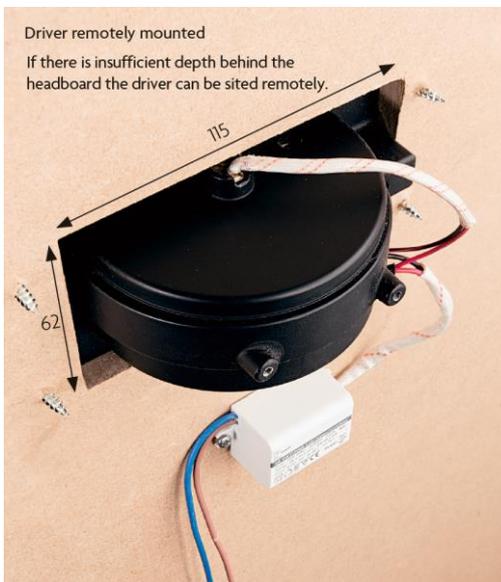

- Ensure mains supply is switched off and make power supply connections (Blue – neutral, Brown – live, Green – earth)
- Re-fit decorative front plate by pushing onto the spring clips.
- THIS PRODUCT SHOULD ONLY BE INSTALLED BY A COMPETENT PERSON.

*OPTIONAL COLOUR FINISHES